



AIRDUC® PUR 355 CSH ORANGE




Abrasion-proof suction and transport hose, especially suitable:
 • for public utility street cleaning vehicles

Hose construction

Wall 2.5 mm

Temperature range

-40 °C ÷ +90°C; with peaks up to +125 °C

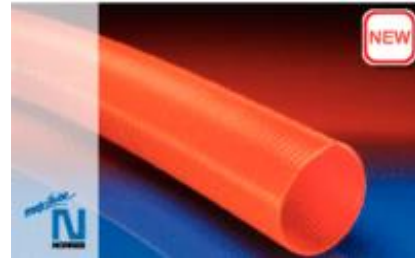

- extremely abrasion-proof with reinforcement underneath wire and narrow hose pitch
- smooth interior

No	I.D. mm	O.D. mm	Pressure bar	Vacuum bar	Bending radius mm	Weight kg/m	Max length m
355-0200-5202	200	213	0,600	0,120	416	5,130	
355-0208-5202	208	221	0,600	0,120	442	5,330	
355-0255-5202	255	268	0,485	0,075	536	6,540	
355-0350-5202	350	363	0,340	0,050	726	8,980	
355-0352-5202	352	365	0,340	0,050	730	9,030	

Contact us:

"DAIS GLOBAL " LTD
 3, Poruchik Nedelcho Bonchev Str., fl. 5
 1528 Sofia, Bulgaria
 Telephone: +359 2 973 27 67
 Fax: +359 2 973 26 65
 E-mail: office@daisglobal.eu

Catalogues:

Ducting hoses
 Industrial hoses
 Fittings
 Safety couplings
 Chemical resistance table ducting hoses
 Chemical resistance table hoses