



LBD

Discharge hose for handling of ammonia for example during the production of fertiliser (urea), chemicals, pulp and ammonia water.

Hose construction

Lining: NBR white, electr. non-conductive, conform to FDA

Reinforcements: Textile braids with tinned copper strands

Cover: NBR compound, blue, non-conductive

Temperature range


-25°C ÷ +90°C peaks up to +130°C

Tolerances

I.D. По UNI EN ISO 1307/97

O.D. RMA steel mandrel: ± 1,59 mm

L ± 1%

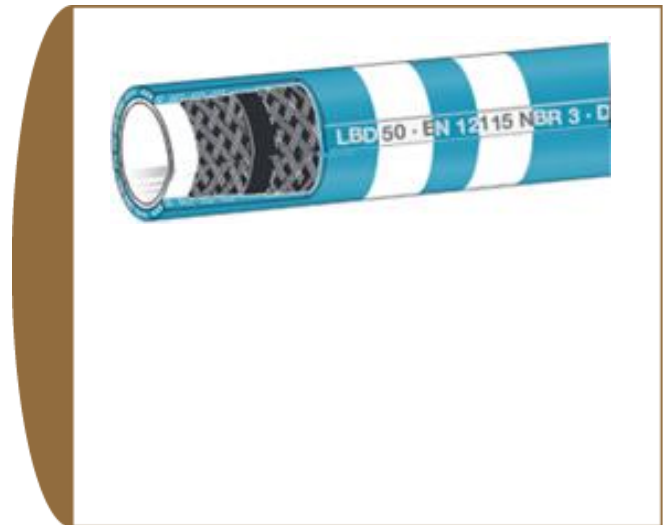

Number	I.D. mm	O.D. mm	WP bar	BP bar	Weight kg	Min R mm
LBD19/40	19	31	16	48	0.6	100
LBD25/40	25	37	16	48	0.8	150
LBD32/40	32	44	16	48	1.0	175
LBD38/40	38	51	16	48	1.2	200

Contact us:

"DAIS GLOBAL " LTD
3, Poruchik Nedelcho Bonchev Str., fl. 5, 1528 Sofia, Bulgaria
Telephone: +359 2 973 27 67
Fax: +359 2 973 26 65
E-mail: office@daisglobal.eu

Catalogues:

Ducting hoses
Industrial hoses
Fittings
Safety couplings
Chemical resistance table ducting hoses
Chemical resistance table hoses