





## NORFLEX® PUR 401 MHF

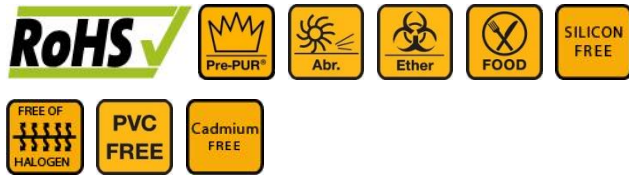

For the food and pharmaceutical industry; for electrical installations, installation in switchboard plant, switch cabinets and mechanical engineering; as pressure hose for gaseous and liquid media.

### Hose construction

NORFLEX® full plastic conduit; wall: special premium ether-polyurethane (Pre-PUR®)



### Temperature range

-40°C to +90°C (short time +125°C).

### Съответства на

- food quality wall complies with: FDA 21 CFR 177.2600 and 178.2010, EC guideline 2002/72/ EC, German guideline XXXIX BfR polyurethane
- approval according to EC guideline 2002/72/ EC incl. the latest amendments 2008/39/EC and 975/2009 for the complete conduit by independent institute



- smooth interior and exterior
- highly flexible
- highly abrasion-proof
- high tensile strength and tear resistant
- good resistance to UV and ozone
- very good low temperature flexibility
- small bending radiuses
- free of softener and halogen
- light weight
- insulating
- breakdown voltage 30 kV/mm

Number	I.D. mm	O.D. mm	connector mm	W kg	Мин R mm
400-3010-9000	7	10	10	0,050	40
400-3014-9000	10	14	14	0,100	60
400-3017-9000	13	17	17	0,125	90
400-3019-9000	15	19	19	0,140	110
400-3021-9000	16	21	21	0,190	125
400-3027-9000	21	27	27	0,295	140
400-3036-9000	30	36	36	0,405	200
400-3045-9000	38	45	45	0,595	250
400-3052-9000	44	52	52	0,785	300
400-3056-9000	48	56	56	0,850	350

### Contact us:

"DAIS GLOBAL " LTD  
 3, Poruchik Nedelcho Bonchev Str., fl. 5, 1528 Sofia, Bulgaria  
 Telephone: +359 2 973 27 67  
 Fax: +359 2 973 26 65  
 E-mail: office@daisglobal.eu

### Catalogues:

Ducting hoses  
 Industrial hoses  
 Fittings  
 Safety couplings  
 Chemical resistance table ducting hoses  
 Chemical resistance table hoses