



NORPLAST® PVC PUR 387





Special and abrasion-proof suction and transport hose, especially suitable:

- for high flow-rates of extremely abrasive solids such as sand, gravel, grain, refuse glass and chips
- for gaseous and liquid media
- for silo vehicles
- as conveying hose in glassworks, docks, steelworks, quarries, shipyards, cementworks etc.

Hose construction

hard plastic spiral integrated in wall
 spiral: rigid PVC
 smooth interior
 wall: interior polyurethane layer, exterior soft PVC

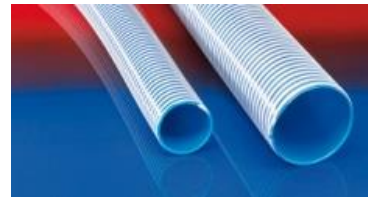

- extremely abrasion-proof
- smooth interior
- very high pressure, vacuum and compression resistance
- high axial strength
- good resistance to UV and ozone

Temperature range

-20°C ÷ +70°C, with peaks up to +80°C

No	I.D. mm	O.D. mm	Pressure bar	Vacuum bar	Bend radius mm	Weight kg/m	Max length m
387-0076-0000	76	90	6,000	0,900	550	2,200	13,5 30
387-0090-0000	90	105	5,500	0,900	640	2,600	13,5 30
387-0102-0000	102	118	4,000	0,900	850	3,300	13,5 30
387-0127-0000	127	145	3,000	0,900	1100	4,200	13,5 30
387-0152-0000	152	173	3,000	0,900	1400	6,400	13,5 20

Contact us:

"DAIS GLOBAL " LTD
 3, Poruchik Nedelcho Bonchev Str., fl. 5
 1528 Sofia, Bulgaria
 Telephone: +359 2 973 27 67
 Fax: +359 2 973 26 65
 E-mail: office@daisglobal.eu

Catalogues:

Ducting hoses
 Industrial hoses
 Fittings
 Safety couplings
 Chemical resistance table ducting hoses
 Chemical resistance table hoses