

INGLAS 30

Suitable for cooling water delivery in foundries, steel and glass factories. Particularly designed to withstand short contacts with molten metal and glass.

Hose Construction


Tube: Black, smooth EPDM insulating rubber compound. Resistant to hot air and hot water

Reinforcement: Synthetic textile fabrics

Cover: Black, smooth, EPDM rubber compound, heat, abrasion and weather resistant, covered by protective glass fiber

Temperature Range



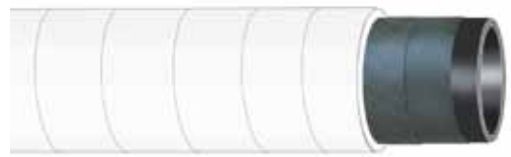


-40 °C (-40 °F) - maximum of +120 °C (+248 °F)
The cover withstands peaks of +375 °C (+707 °F)



- High peaks of temperature
- Specific for foundries, furnaces and glass factories
- White cover in fiber glass
- Burst Pressure Value 3:1

Tolerances

According to RMA steel mandrel
Refer to Technical Handbook on page TH34

Part Number				Working Pressure					in Stock
	I.D. (mm)	O.D. (mm)	MPa	psi	bar	kg/m	min. Bend Radius (mm)		
IH42302702/40	10	20	1.0	150.0	10	0.27	80	Y	
IH42302704/40	13	23	1.0	150.0	10	0.33	105	Y	
IH42302710/40	19	31	1.0	150.0	10	0.56	155	Y	
IH42302716/40	25	39	1.0	150.0	10	0.88	200	Y	
IH42302718/40	32	48	1.0	150.0	10	1.23	255	Y	
IH42302726/40	38	58	1.0	150.0	10	1.89	300	Y	
IH42302732/40	42	60	1.0	150.0	10	1.69	340	Y	
IH42302724/40	45	62	1.0	150.0	10	1.71	360	Y	
IH42302740/40	51	69	1.0	150.0	10	2.05	400	Y	
IH42302754/40	65	87	1.0	150.0	10	3.21	520	Y	
IH42302758/40	85	110	1.0	150.0	10	5.47	680	Y	

Distributed by:



Bulgaria
Telephone: +359 2 973 27 67
Fax: +359 2 973 26 65
E-mail: office@daisglobal.eu
Web: http://markuchi.eu/

România
Telephone/Fax : +40 21 780 45 58
E-mail: office_ro@opwmarket.com
Web: http://furtunuri.eu/

Srbija
Telephone/Fax : 038111/2619-200
E-mail: office_sr@opwmarket.com
Web: http://creva.eu/