



LBS

Discharge hose for handling of ammonia for example during the production of fertiliser (urea), chemicals, pulp and ammonia water.

Hose construction

Lining: NBR white, electr. non-conductive, conform to FDA

Reinforcements: Textile braids with tinned copper strands

Cover: NBR compound, blue, non-conductive

Temperature range


-25°C ÷ +90°C peaks up to +130°C

Tolerances

I.D. По UNI EN ISO 1307/97

O.D. RMA steel mandrel: ± 1,59 mm

L ± 1%

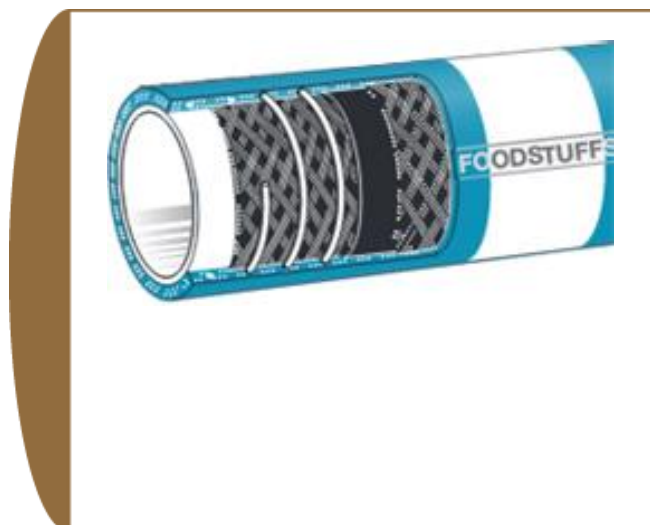

Number	I.D. mm	O.D. mm	WP bar	BP bar	Weight kg	Min R mm
LBS50/40	50	64	16	48	2.1	130
LBS63/40	63	79	16	48	2.5	160
LBS75/40	75	90	16	48	3.3	180
LBS100/40	100	116	16	48	4.8	250

Contact us:

"DAIS GLOBAL " LTD
3, Poruchik Nedelcho Bonchev Str., fl. 5, 1528 Sofia, Bulgaria
Telephone: +359 2 973 27 67
Fax: +359 2 973 26 65
E-mail: office@daisglobal.eu

Catalogues:

Ducting hoses
Industrial hoses
Fittings
Safety couplings
Chemical resistance table ducting hoses
Chemical resistance table hoses