



MAX

Softwall hot water discharge hose, for water that is even slightly acidic, suitable also for non corrosive fluids in numerous applications in chemical industries. See IVG chemical resistance chart.

Hose construction


Tube: black, smooth, EPDM rubber.

Reinforcement: high strength synthetic cord.

Cover: black, smooth, (wrapped finish) EPDM rubber, heat, weathering, and ozone resistant.

Hose temperature range

-40°C to +120°C

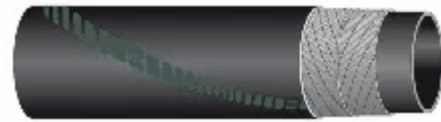

Hot water discharge hose, for water that is even slightly acidic, suitable for applications in chemical industries, heat resistant cover.

Code	ID - mm	OD - mm	WP - bar	BP - bar	Weight - kg/m	Lengthd - m
MAX012020	10	20	10	30	0,31	120
MAX012022	12	22	10	30	0,35	120
MAX012020	13	20	10	30	0,22	120
MAX012025	15	25	10	30	0,41	120
MAX012026	16	26	10	30	0,43	120
MAX012028	18	28	10	30	0,47	120
MAX012027	19	27	10	30	0,33	120
MAX012030	20	30	10	30	0,51	120
MAX012035	25	35	10	30	0,61	120
MAX012042	30	41,5	10	30	0,82	120
MAX012044	32	43,5	10	30	0,86	120
MAX012050	38	50	10	30	1,06	120
MAX012061	45	61	10	30	1,66	120
MAX012066	51	65,5	10	30	1,66	120
MAX012079	63,5	78,5	10	30	1,94	120

Contact us:

"DAIS GLOBAL " LTD
 3, Poruchik Nedelcho Bonchev Str., fl. 5, 1528 Sofia, Bulgaria
 Telephone: +359 2 973 27 67
 Fax: +359 2 973 26 65
 E-mail: office@daisglobal.eu

Catalogues:

Ducting hoses
 Industrial hoses
 Fittings
 Safety couplings
 Chemical resistance table ducting hoses
 Chemical resistance table hoses