



## UTL

Lightweight tanker hose PN 10 suitable i.e. for unloading of tank wagons and for applications where special flexibility and easy handling is required. The mentioned bending radius is a safety value. Without visual signs of kinking, the hose might be bent further; if long time practice the UPE tube will have a reduced service life.

### Hose construction

**Tube:** Ultra high molecular polyethylene UPE, white, with spiral conductive stripe, smooth bore, abrasion resistant, no discoloration, conductive ( $\Omega / T$ )


**Reinforcement:** Thermoplast braids, galvanised double steel helix

**Cover:** EPDM (EPT), black, smooth surface with corrugations, conductive, ozone resistant, UV resistant, flame resistant

### Temperature range

- 30° to + 100°C

Steaming out for cleaning and sterilisation permissible up to 130°

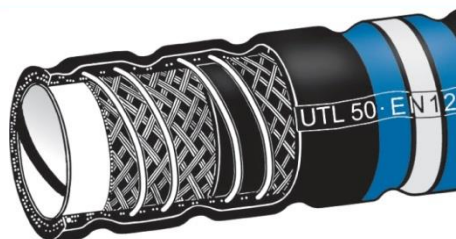

- Flexibility
- UPE tube
- Lightweight
- Chemical resistant
- For pressure and vacuum

**According to**  
EN 12115, TRbF 131/1

Number	I.D. mm	O.D. mm	WP bar	BP bar	Weight kg	R min mm
UTL50/40	50	65	10	16	1,8	150
UTL63/40	63	78	10	16	2,2	180
UTL75/40	75	90	10	16	2,9	200
UTL100/40	100	116	10	16	3,9	275

## Contact us:

"DAIS GLOBAL " LTD  
3, Poruchik Nedelcho Bonchev Str., fl. 5, 1528 Sofia, Bulgaria  
Telephone: +359 2 973 27 67  
Fax: +359 2 973 26 65  
E-mail: office@daisglobal.eu

## Catalogues:

Ducting hoses  
Industrial hoses  
Fittings  
Safety couplings  
Chemical resistance table ducting hoses  
Chemical resistance table hoses