



YORK

Flexible radiator hose for conveying hot water mixed with antifreeze liquids, heat resistant.

Hose construction


Tube: black, smooth, heat resistant synthetic rubber.

Reinforcement: high strength synthetic cord.

Cover: black, smooth (wrapped finish), heat and ageing resistant synthetic rubber.

Temperature range

-30 °C to +100 °C

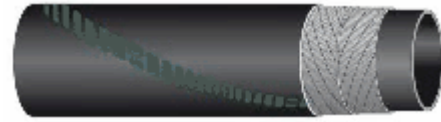

Softwall hose for conveying hot water mixed with anti-freeze liquids in cooling systems.

Code	ID - mm	OD - mm	WP - bar	BP - bar	Weight - kg/m	Lenght - m
IH36830101	19	27	3	9	0,35	120
IH36830102	20	26	3	9	0,28	120
IH36830104	25	32	3	9	0,38	120
IH36830105	28	36	3	9	0,48	120
IH36830107	32	40	3	9	0,54	120
IH36830109	38	46	3	9	0,63	120
IH36830112	45	54	3	9	0,86	120
IH36830113	51	61	3	9	1,15	120
IH36830116	63,5	73,5	3	9	1,37	120
IH36831022	76	86	3	9	1,66	120
IH36830120	102	112	3	9	2,19	120
YORK125138	125	138	3	9	3,32	120
YORK152166	152	166	3	9	4,47	120

Contact us:

"DAIS GLOBAL " LTD

3, Poruchik Nedelcho Bonchev Str., fl. 5, 1528 Sofia, Bulgaria

Telephone: +359 2 973 27 67

Fax: +359 2 973 26 65

E-mail: office@daisglobal.eu