



ZEMENT D

Grey band hose for dry cement, plaster, kieselguhr, granulates, wheat and feeding stuffs

Hose construction

Lining: Special rubber compound black, el. conductive

Reinforcements: One textile braid with tinned copper strands

Cover: SBR black, electrically conductive

Temperature range


-20 °C ÷ +70 °C

Tolerances

I.D. ± 1,59 mm

O.D. ± 2,38 mm

L ± 1%

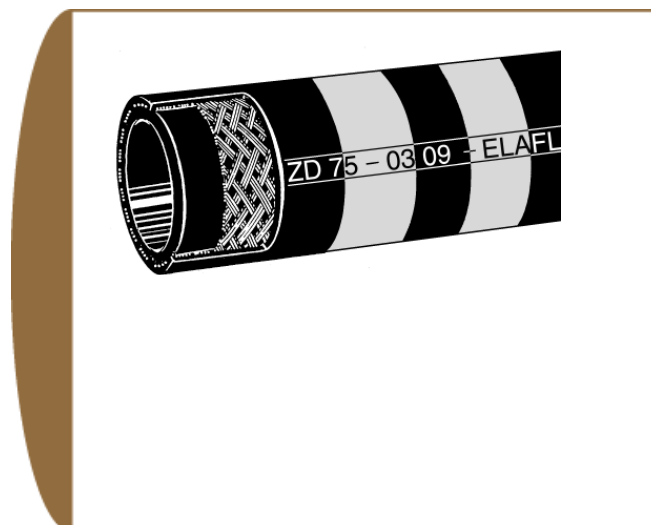

Number	I.D. mm	O.D. mm	WP bar	BP bar	Weight kg	Min R mm
ZD75/40	75	91	6	18	3	400
ZD100/40	100	120	6	18	4	550

Contact us:

"DAIS GLOBAL " LTD
3, Poruchik Nedelcho Bonchev Str., fl. 5, 1528 Sofia, Bulgaria
Telephone: +359 2 973 27 67
Fax: +359 2 973 26 65
E-mail: office@daisglobal.eu

Catalogues:

Ducting hoses
Industrial hoses
Fittings
Safety couplings
Chemical resistance table ducting hoses
Chemical resistance table hoses