



## PROTAPE® PUR 327 MEMORY





Abrasion-proof suction and transport hose, especially suitable:

- for abrasive solids such as dust, powder, fibres, chips and granulates
- for gaseous and liquid media
- for public utility street cleaning vehicles
- for lawnmowers, grass sweeping machines and leaves exhaust
- for fodder transport

### Hose construction

special plastic-profile supporting spiral extruded tape; wall: special premium ether-polyurethane (Pre-PUR®) wall thickness 0.9 mm approx.

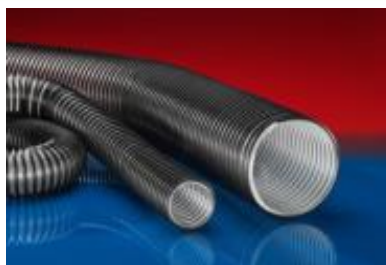

- vibration resistant
- crush-proof
- medium-heavy model
- highly flexible

### According to

- FDA 21 CFR177.2600 and 178.2010, EU Directive 2002/72/EC, incl. amending Directives 975/2009 and Regulation No. 10/2011

### Temperature range

-40 °C ÷ около +90 °C; peaks up to +125 °C

No	I.D. mm	O.D. mm	Pressure bar	Vacuum bar	Bend radius mm	Weight kg/m	Max length m
327-0050-0000	50	67	1,235	0,270	100	0,630	10
327-0060-0000	60	77	1,035	0,200	110	0,740	-
327-0075-0000	75	92	0,830	0,140	125	0,910	-
327-0080-0000	80	97	0,775	0,100	130	0,960	-
327-0100-0000	100	117	0,620	0,050	140	1,180	10
327-0120-0000	120	137	0,520	0,035	165	1,410	-
327-0125-0000	125	142	0,505	0,035	175	1,460	10
327-0140-0000	140	157	0,450	0,030	190	1,630	-
327-0150-0000	150	167	0,415	0,025	200	1,740	10
327-0160-0000	160	177	0,390	0,020	210	1,850	-
327-0200-0000	200	217	0,315	0,010	250	2,300	10

### Contact us:

"DAIS GLOBAL " LTD  
 3, Poruchik Nedelcho Bonchev Str., fl. 5  
 1528 Sofia, Bulgaria  
 Telephone: +359 2 973 27 67  
 Fax: +359 2 973 26 65  
 E-mail: office@daisglobal.eu

### Catalogues:

Ducting hoses  
 Industrial hoses  
 Fittings  
 Safety couplings  
 Chemical resistance table ducting hoses  
 Chemical resistance table hoses